

INSTRUCTION MANUAL

TRIPLE RADIO **DAB / DAB / FM RDS TUNER** **X 3 Units**

	<table border="1"><tr><td>CAUTION</td></tr><tr><td>RISK OF ELECTRONIC SHOCK DO NOT OPEN</td></tr></table>	CAUTION	RISK OF ELECTRONIC SHOCK DO NOT OPEN		CAUTION: TO REDUCE THE RISK OF ELECTRONIC SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER-SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.
CAUTION					
RISK OF ELECTRONIC SHOCK DO NOT OPEN					



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

<p>WARNING: TO PREVENT FIRE OR SHOCK HAZARD, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.</p>

Outward Appearance

Face plate:



Rear plate:



SUPPLEMENTS:

- Offer 3 outputs, able to play music in 3 areas.
- With remote control function. 1 remote controller controls 3 units.

SUPPLEMENTS:

- Antenna Wire x 1
- AV Wire x 3
- AC Power Cord x 1
- Remote Controller x 1

INSTALLATION:

1. Connect AV Cord to OUTPUT Terminal.
2. Connect AC Power Cord in between Socket and AC power resource in AC 230V. Or Connect DC Power Cord in DC 13.2V for emergency power supply.
3. Connect ANT. Wire.
4. Connect to Ground 




- **POWER** : Main power of the unit
- **ST. BY** : Press for Stand By mode.
- **MODE** : Press to switch DAB or FM mode.
- **SCAN** : Radio station searching. Press SCAN, wait for 3 seconds, will automatically scan available stations.
- **- TUNING +** :
 1. In FM mode, short press to next 50Khz frequency. Long press will auto scan to next available station.
 2. In DAB mode, select the station type. After the type is searched, LCD will show the type of station. Wait for 3 seconds, the player will transfer to selected type.
- **TA Traffic Announcement:**
Press TA, RDS will automatically search for the traffic stations. It will stop at available traffic station.
- **MEM** : Radio station memory setting.
 1. Select the radio station
 2. Press MEM
 3. Press **▲ MEMORY ▼** to select which memory station to stored,
Up to 40 stations can be stored. Press MEM again to confirm memory.
 4. Repeat above steps to store more stations.
- **INFO / MENU** :
Information :
 - ✓ In FM band, press INFO button, the information sequence is : the receive signal strength(RSSI) and the stereo/mono → RDS text(RT) → RDS program type(PTY) → current time → current day → RDS alternative frequency(AF) on/off.

- ✓ In DAB mode, press INFO button, the information sequence is : DAB text → DAB program type(PTY) → DAB time → DAB date → DAB receive bit rate → current frequency → DAB receive bit error

REMOTE CONTROL

The remote control operates in the same way to the main keypad.

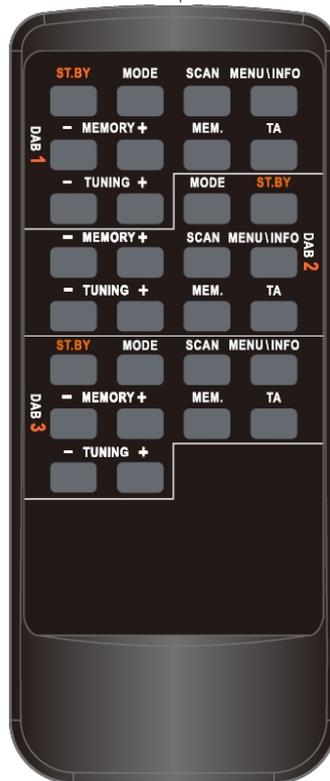

Button	Function
ST.BY	Standby: Turn on or back to standby mode (showing clock and date).
MODE	Switch to FM or DAB mode
SCAN	Auto scan for radio station
MEM	Memory setting and confirm
- MEMORY +	Recall preset
- TUNING +	Tuning
TA	Traffic announcement
MENU \ INFO	Information Menu