



# ACT-2401 Single-Channel Digital Receiver

## Key Features

- 2.4GHz-ISM band stable digital FSK modulation circuitry. All frequencies are located in this band.
- With the FHSS frequency-hopping technique, each channel has 4 preset hopping frequencies.
- By using an adaptive tracking algorithm, it can skip the Wi-Fi frequency in use and effectively avoid interference from 2.4GHz communication products.
- The hopping frequencies skip most of the Wi-Fi frequencies.
- With dual tuner true diversity receiving, the receiving distance is up to 100 meters (330 ft.) with no signal drop-out.
- The precisely designed PCB is enclosed in a sturdy case.
- The antennas are fixed at the left / right side of the front panel.
- The transmitter has a high-efficiency circuitry design. The included single rechargeable lithium battery can be easily removed or interchanged for charging. The intelligent battery charger maintains a high charge capacity for up to 600 charge cycles for cost saving and is environmentally friendly.
- An affordable price for entry-level consumers and the music instrument market.

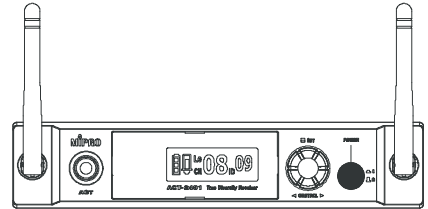

## Transmitters & Microphones

<b>ACT-24HC</b>	Digital Handheld Transmitter
<b>ACT-24TC</b>	Digital Bodypack Transmitter
<b>ET-24</b>	Digital Erhu Microphone Set
<b>MT-24</b>	Digital Guitar Transmitter
<b>ST-24</b>	Digital Saxophone Microphone Set
<b>VT-22</b>	Digital Cello Microphone Set

## Accessories

<b>FB-71</b>	Rack Mount Kit
<b>FB-72</b>	Rack Mount Kit

## Technical Specifications

Chassis	EIA Standard 19" 1/2U
Display	Graphic OLED
Frequency Range	ISM 2,400 - 2,4835 MHz
Preset Frequency	12
Frequency-hopping	Each channel has 4 preset hopping frequencies
Receiving Mode	Dual-tuner Digital Diversity
Audio Sampling	24-bit / 44.1 kHz
Sensitivity	-95 dBm
S/N Ratio	> 115 dB(A)
T.H.D.	0.1 % @ 1 kHz
Audio Frequency Response	20 Hz - 20 kHz (-2 dB)
Output Connectors	Balanced XLR & Unbalanced 6.3 mm (1/4 ")
Audio Output Adjustment	0 dB (standard), -10 - +20 dB adjustable range
Latency	< 4.0 ms
Antenna	2 x 50 O fixed antenna
Power Supply	External AC Power Supply
Power Consumption	1.6 W
Dimensions	210 x 44 x 180 mm / 8.3 x 1.7 x 7.1 "
Weight	Approx. 0.75 kg / 1.7 lbs
Operating Temperature	-10 - +60



MIPRO Electronics Co., Ltd

Headquarters: 814 Pei-kang Road, Chiayi, 60096, Taiwan  
 Tel: +886.5.238.0809 | Fax: +886.5.238.0803  
 www.mipro.com.tw | mipro@mipro.com.tw