


A0852045 Havana Ribbon EWW-30-36 24V

Technical specifications:

LED system: 150x 0.24W extra warm-white LED (5050) 2700K
 View angle: 120°
 Light output: 2050 Lumen/5mtr. (410Lm/mtr.)
 Power consumption: 5mtr max. 1.5A (36W)
 1mtr max. 0.3A (7.2W)
 Strip: IP65 (Acryl/PVC/) (24V Connection = IP20)
 Cutting length: 10cm (5 LED 's) = 1.2W
 Working temperature: -20°C until +50° C
 Backside: Self adhesive 3M tape

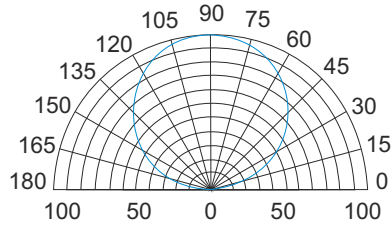


Relative luminous distribution



The Havana Ribbon should not be used in hot places
 The best heat dissipation is to mount the Ribbon on an aluminum strip or Arctea Alu-Pro Profile. Ensure a proper heat dissipation

0.09	24V DC	Class III	IP20	F mark	Light-output / meter 400Lm	120° symm. LED-lens	mm L 5000 X W 12 X H 2.6
------	--------	-----------	------	--------	-------------------------------	---------------------------	-----------------------------------



5 meter Havana Dropper is packed on reel, in anti-static bag



<p>Advised 8 ch. DMX controller:</p> <p>A9915063 Domotion ART-8D white included IR remote control</p> <ul style="list-style-type: none"> • 8 DMX channels • 8 programmable scenes • Masterdim • Switch-Fade-Off-time 1-8 sec. • Scene to Scene fade 1-8 sec. 	<p>Dimensions in mm</p>	<p>Advised 8 ch. DMX controller:</p> <p>A9915062 Domotion ART-8D black included IR remote control</p> <ul style="list-style-type: none"> • 8 DMX channels • 8 programmable scenes • Masterdim • Switch-Fade-Off-time 1-8 sec. • Scene to Scene fade 1-8 sec. 	<p>Dimensions in mm</p>
--	-------------------------	--	-------------------------

Advised 24V DC LED powersupplies:

A9900361 DC 24V 60W
(load max. 1x 5m A0852045)
Dimensions: 181x62x35mm
Weight: 0.50 Kg

A9900362 DC 24V 96W
(load max. 2x 5m A0852045)
Dimensions: 200x71x35mm
Weight: 0.52 Kg

IP65

Advised DMX PWM Dimmer:

A9915016 1 channel PWM Dimmer
max. load 24V/4A = 96W
Load max. 2x 5m A0852045
Dimensions: 90x40x20mm
weight: 0.05Kg

Dimensions in mm

Self adhesive 3M tape

cutting length: each 167mm

Dimmable

DMX or Dali-line to next Dimmerpack

The total length of each strip can not be more than 5 mtr. Do not use in hot places. Ensure a proper heat dissipation

Non Dimmable

The total length of each strip can not be more than 5 mtr. Do not use in hot places. Ensure a proper heat dissipation

A. Dimmable

A9915094 ART-8D DMX-512 Controller
8 DMX-Channels & 8 Programable scenes
Included IR remote control
(without using the built-in Dimmerpack)



230V AC


A9930004 Attema U50 Wallbox
(not included)



Wallbox-Powersupply
(not included)
A9900030 PSU-12 12VDC
or
A9900031 PSU-24 24VDC
Dimensions: Ø53 x 29.3 mm

DMX-line

DMX-line to next
Dimmerpack



24V DC



A9915016 Domotion 1 ch. DMX PWM-Dimmerpack
max. total load 24V/4A = 96W

5 mtr. (one chain) Havana Ribbon EWW-30 contents 150 LED's (= 36W)
Load max. 2x 5 meter Havana Ribbon EWW-30 (= 36W)
to Domotion 1-ch. DMX-512 PWM Dimmerpack
and keep 24V DC cables short as possible (see Notes)
(max 24V DC cable length (see page 3-7))


230V AC

24V DC



max.
5mtr

max.
5mtr



24V DC



A9915016 Domotion 1 ch. DMX PWM-Dimmerpack
max. total load 24V/4A = 96W

5 mtr. (one chain) Havana Ribbon EWW-30 contents 150 LED's (= 36W)
Load max. 2x 5 meter Havana Ribbon EWW-30 (= 36W)
to Domotion 1-ch. DMX-512 PWM Dimmerpack
and keep 24V DC cables short as possible (see Notes)
(max 24V DC cable length (see page 3-7))

230V AC

24V DC



max.
5mtr

max.
5mtr

B. Non Dimmable



230V AC

24V DC

5 mtr. (one chain) Havana Ribbon EWW-30 contents 150 LED's (= 36W)
Load max. 2x 5 meter Havana Ribbon EWW-30 (= 36W)
to Domotion 1-ch. DMX-512 PWM Dimmerpack
and keep 24V DC cables short as possible (see Notes)
(max 24V DC cable length (see page 3-7))

24V DC



max.
5mtr

max.
5mtr

Notes:

UK

The thickness of the 24V DC cable depends on the total cable length and total power consumption of all connected fixtures. (See page 3)

NL

De diameter van de 24V DC-kabel is afhankelijk van de totale lengte van de kabel en het totale stroomverbruik van alle verbonden toestellen. (zie tabel op pagina 4)

D

Der Durchmesser des 24V DC-Kabels hängt von der Gesamtlänge des Kabels und der gesamten Leistungsaufnahme aller angeschlossenen Geräte ab. (Siehe Tabelle auf Seite 5)

FR

Le diamètre du câble d'alimentation 24V DC dépend de la longueur totale du câble et la consommation électrique totale de tous les périphériques connectés. (voir page 6)

ES

La sección del cable de 24V DC depende de la longitud total del cable y el consumo de energía total de todas las luminarias (véase la página 7)

IT





Il diametro del cavo 24V DC dipende dalla lunghezza totale del cavo e il consumo di energia totale di tutti apparecchi collegati.

Recommended cable conductor surface (mm²) with cable lengths of 1-50 meters. for parallel connected 24 volt LED fixtures.

Note; This table is an obligation and not a binding opinion. If necessary, make a electrical resistance calculation ($Pouillet A \times R = p \times l$)

24 Volt	Cable inner conductor 1.5mm ²					Cable inner conductor 2.5mm ²					Cable inner conductor 4mm ²					
	Watt	24	48	72	96	120	144	168	192	216	240	264	288	312	336	360
Kabel-lengte (m)	Ampere	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
1																
2																
3																
4																
5																
6																
7																
8																
9																
10																
11																
12																
13																
14																
15																
16																
17																
18																
19																
20																
21																
22																
23																
24																
25																
26																
27																
28																
29																
30																
31																
32																
33																
34																
35																
36																
37																
38																
39																
40																
41																
42																
43																
44																
45																
46																
47																
48																
49																
50																

- As much as possible shortest path for the 12V cables
- Branching cables without interrupting the main cable
- Transformer must be placed in centre of the connected fixtures
- Polarity: positive (+) = red or brown, minus (-) = black or blue
- Transformer-capacity 25% greater than the sum of conected fixtures

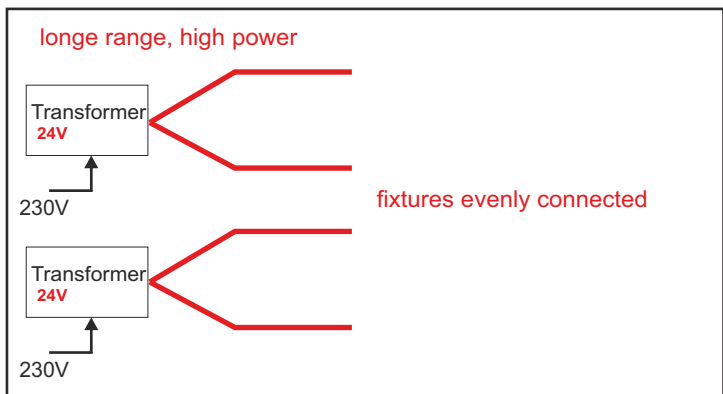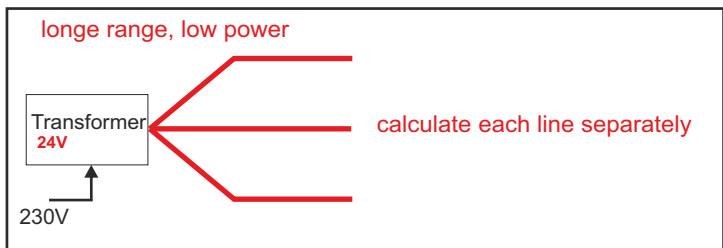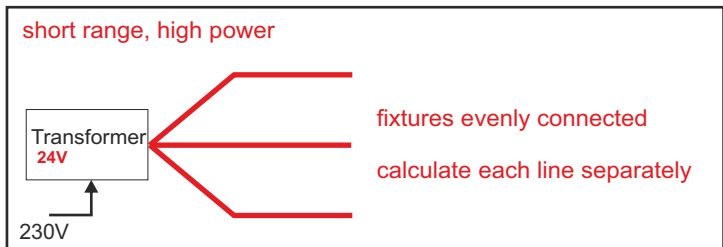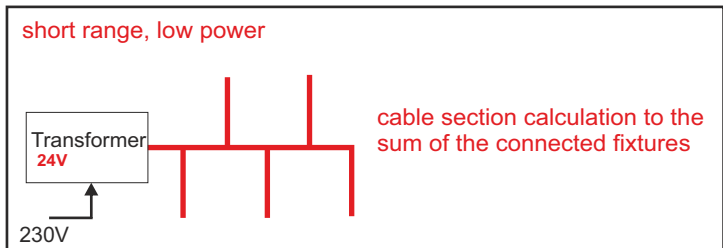

Geadviseerd kabelgeleider-oppervlak (mm²) bij kabellengtes van 1-50 mtr. voor 24 Volt parallel aangesloten LED armaturen.

Note; Deze tabel is een vrijblijvend en geen dwingend advies. Maak indien nodig een berekening van elektrische weerstand en geleidbaarheid met de wet van Pouillet ($A \times R = p \times l$)

24 Volt	Kabelgeleider 1.5mm ²					Kabelgeleider 2.5mm ²					Kabelgeleider 4mm ²				
	Watt	24	48	72	96	120	144	168	192	216	240	264	288	312	336
Kabel-lengte (m) \ Ampere	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
1															
2															
3															
4															
5															
6															
7															
8															
9															
10															
11															
12															
13															
14															
15															
16															
17															
18															
19															
20															
21															
22															
23															
24															
25															
26															
27															
28															
29															
30															
31															
32															
33															
34															
35															
36															
37															
38															
39															
40															
41															
42															
43															
44															
45															
46															
47															
48															
49															
50															

Zoveel mogelijk kortste weg voor de 24V kabels


Kabels aftakken zonder de hoofdkabel te onderbreken

Trafo mogelijk in het midden plaatsen

Polariteit: plus(+) = rood of bruin, min(-) = zwart of blauw

Trafo-capaciteit 25% hoger kiezen dan de som der belastingen

korte afstanden, laag vermogen

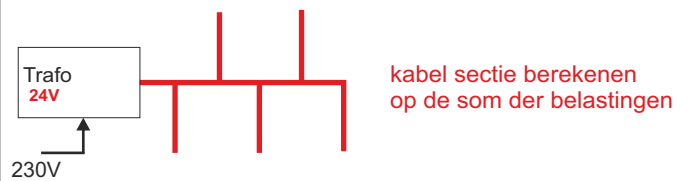

korte afstanden, hoog vermogen



lange afstanden, laag vermogen



lange afstanden, hoog vermogen







Empfohlener Querschnitt vom Kabelinnenleiter in mm² bei Kabellängen von 1-50 Meter für parallel geschaltete 24-Volt-LED-Leuchten.

Bitte beachten: Diese Tabelle ist eine unverbindliche Beratung. Falls erforderlich, eine Berechnung vom elektrischen Widerstand und Leitfähigkeit mit der Formel von Pouillet machen

24 Volt		Kabelinnenleiter 1.5mm ²					Kabelinnenleiter 2.5mm ²					Kabelinnenleiter 4mm ²				
		Leistung (Watt)														
Leistung (Watt)		24	48	72	96	120	144	168	192	216	240	264	288	312	336	360
Kabel- länge (m)	Ampere	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
	1															
2																
3																
4																
5																
6																
7																
8																
9																
10																
11																
12																
13																
14																
15																
16																
17																
18																
19																
20																
21																
22																
23																
24																
25																
26																
27																
28																
29																
30																
31																
32																
33																
34																
35																
36																
37																
38																
39																
40																
41																
42																
43																
44																
45																
46																
47																
48																
49																
50																

- So viel wie möglich dem kürzesten Weg für die 24V-Leitungen
- Kabel abzweigen ohne Unterbrechung der Hauptleitung
- Trafo wenn möglich in der Mitte montieren
- Polarität: positiv(+) = rot oder braun, minus(-) = schwarz oder blau
- Trafo-Kapazität immer 25% größer wählen als die Summe der Last

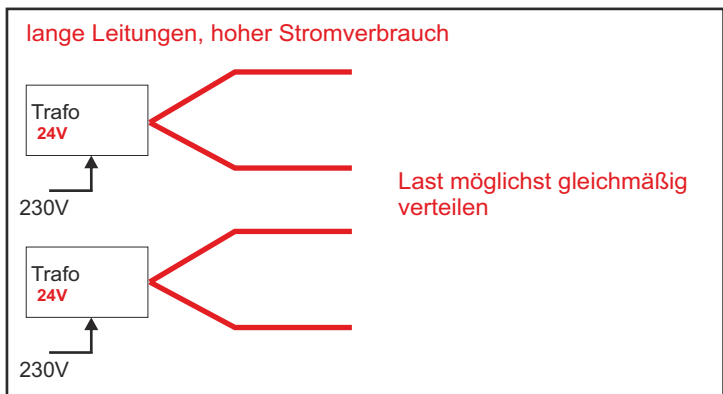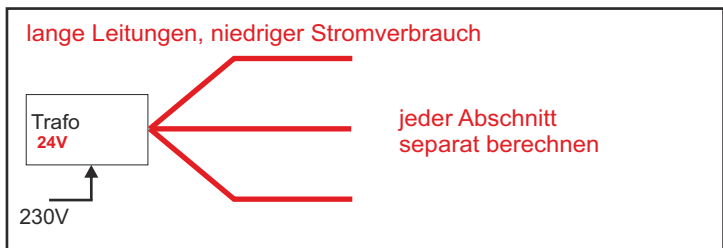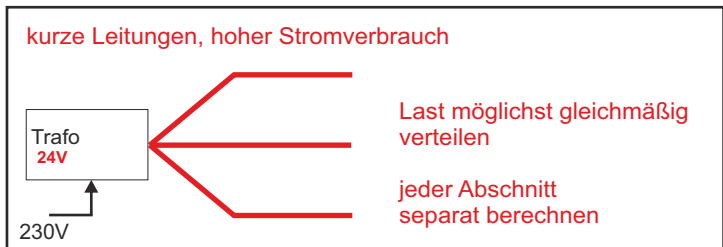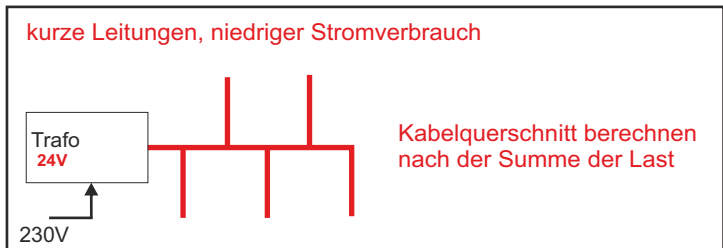

Surface recommandée conducteur de câble (mm²) 1-50 m longueurs de câble. connectés en parallèle pour 24 volts luminaires à LED.

Remarque, Ce tableau est un des conseils informels et non contraignants. Si nécessaire, un calcul de résistance électrique et la conductivité avec la loi de Pouillet ($A \times R = p \times l$)

24 Volts		Conducteur de câble 1.5mm ²					Conducteur de câble 2.5mm ²					Conducteur de câble 4mm ²				
		Puissance (Watt)					Puissance (Watt)					Puissance (Watt)				
Kabel- länge (m)	Ampere	24	48	72	96	120	144	168	192	216	240	264	288	312	336	360
			1	2	3	4	5	6	7	8	9	10	11	12	13	14
1																
2																
3																
4																
5																
6																
7																
8																
9																
10																
11																
12																
13																
14																
15																
16																
17																
18																
19																
20																
21																
22																
23																
24																
25																
26																
27																
28																
29																
30																
31																
32																
33																
34																
35																
36																
37																
38																
39																
40																
41																
42																
43																
44																
45																
46																
47																
48																
49																
50																

Choisir le chemin le plus court pour les câbles 24V





Éclaircie câbles sans interrompre le câble principal

Transformateur peut être centrée

Polarité: positive (+) = rouge ou brun, moins (-) = noir ou bleu

Transformateur-capacité de 25% de plus que de choisir la charge

LED-lampes Parallèlement interrupteur

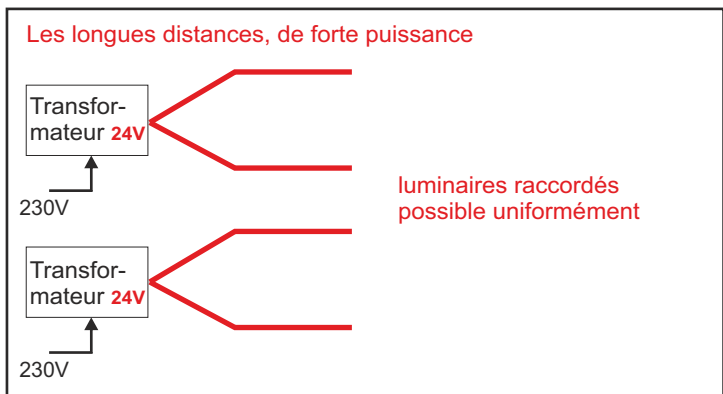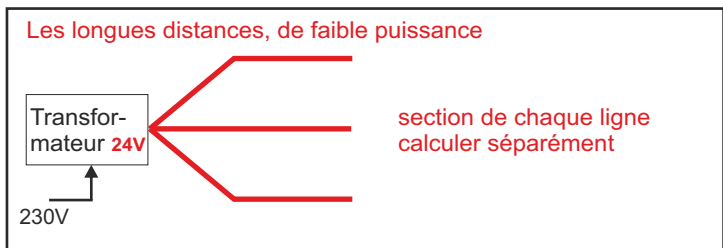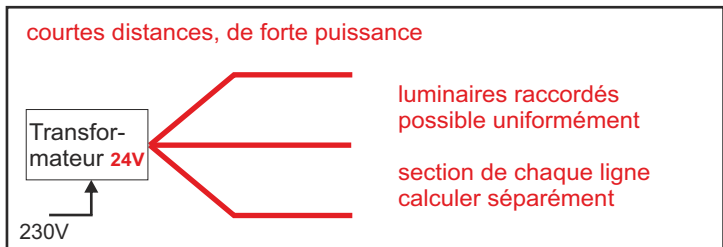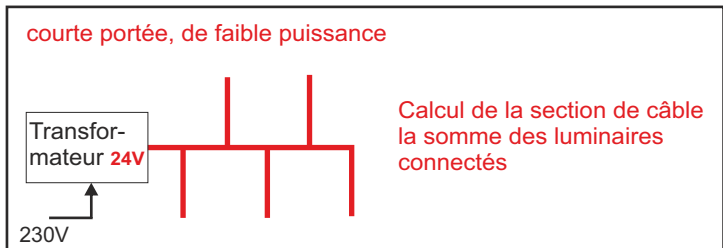

Sección de cable recomendada en mm² con longitudes de cable 1-50 metros. para conectar en paralelo de 24 voltios LED fixtures.

Note; Este cuadro es un consejo informal y no vinculante. Si es necesario, un cálculo de resistencia eléctrica y la conductividad con la ley de Pouillet ($A \times R = p \times l$)

24 Voltios	Sección de cable 1.5mm ²					Sección de cable 2.5mm ²					Sección de cable 4mm ²					
	Watt	24	48	72	96	120	144	168	192	216	240	264	288	312	336	360
Kabel- lengte (m)	Ampere	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
1																
2																
3																
4																
5																
6																
7																
8																
9																
10																
11																
12																
13																
14																
15																
16																
17																
18																
19																
20																
21																
22																
23																
24																
25																
26																
27																
28																
29																
30																
31																
32																
33																
34																
35																
36																
37																
38																
39																
40																
41																
42																
43																
44																
45																
46																
47																
48																
49																
50																

Intente utilizar la mínima distancia de cable en líneas de 12V.


Intente utilizar una línea principal sin cortarlo y sacar de el derivaciones individuales

Si es posible coloque la fuente de alimentación en el centro de la línea [principal de distribución]


Polaridad: positivo (+) = rojo o marrón, negativo (-) = negro o azul

La fuente de alimentación debe ser 25% mayor que la suma de las luminarias a conectar

distancias cortas, de baja potencia

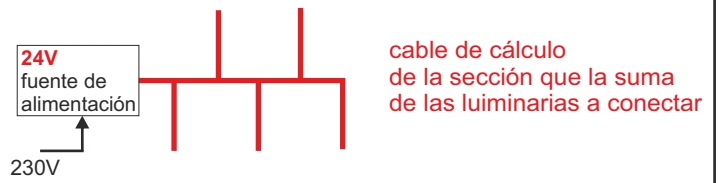

distancias cortas, de alta potencia

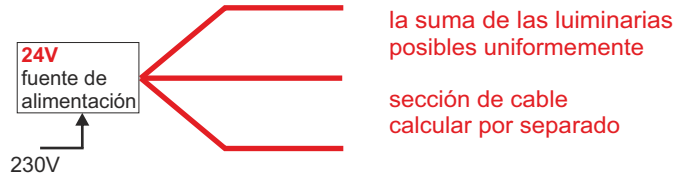

distancias largas, de baja potencia



distancias largas, de alta potencia

