


MPB-24 2.4 GHz Antenna Booster

Profile

Introduced in 2016, the industry's first MPB-24 2.4GHz antenna booster is optimized in the 2.4GHz frequency range to amplify the antenna signals, offering 20 dB gain to compensate for signal loss due to long antenna cables to enhance the reception range and signal stability. With an aluminum casing, it features superb heat dissipation characteristics and constant stability.

Technical Specifications

Frequency Range	2.4 ~ 2.4835 GHz
Gain	Fixed 20 ± 1 dB
Input / Output Connector	1-to-1 TNC. 50 Ω impedance.
Input Power	10 ~ 24 V DC (min. 350 mA)
Regulated Power Output	Equals to the bias
Dimensions (W × H × D)	114 × 24 × 41 mm 4.5 × 0.9 × 1.6 "
Net Weight	Approx. 226 g 8 oz

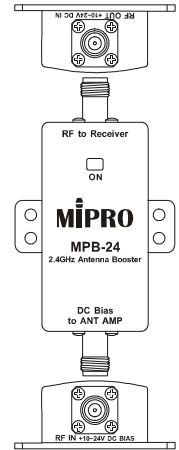

MIPRO Electronics Co., Ltd

Headquarters: 814 Pei-kang Road, Chiayi, 60096, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw