

# Specifications

4065/4066/4067/4088

## Directional characteristics

4065/66/67: Omnidirectional  
4088: Cardioid

## Principle of operation

4065/66/67: Pressure  
4088: Pressure gradient

## Cartridge type

Pre-polarized condenser element with vertical diaphragm

## Frequency range $\pm 2$ dB

Soft boost grid:

4065/66: 20 Hz – 20 kHz, 3 dB soft boost at 8 – 20 kHz  
4067: 50 Hz – 20 kHz, 3 dB soft boost at 8 – 20 kHz,  
lo-cut -10 dB at 20 Hz

High boost grid:

4066: 20 Hz – 20 kHz, 10 dB boost at 12 kHz  
4067: 50 Hz – 20 kHz, 10 dB boost at 12 kHz,  
lo-cut -10 dB at 20 Hz

4088: 100 Hz – 20 kHz ( $\pm 2$  dB between 500 Hz and  
20 kHz; 4 – 6 dB soft boost at 15 kHz)

## Sensitivity, nominal, $\pm 3$ dB at 1 kHz

4065: 6 mV/Pa; -44.5 dB re. 1 V/Pa  
4066: 6 mV/Pa; -44.5 dB re. 1 V/Pa  
4067: 1 mV/Pa; -60 dB re. 1 V/Pa  
4088: 6 mV/Pa; -44.5 dB re. 1 V/Pa

## Equivalent noise level, A-weighted


4065/66/88: Typ. 26 dB(A) re. 20  $\mu$ Pa (max. 28 dB(A))  
4067: Typ. 31 dB(A) re. 20  $\mu$ Pa (max. 35 dB(A))

## S/N ratio, re. 1 kHz at 1 Pa (94 dB SPL)

4065/66/88: 68 dB  
4067: 63 dB

## On-axis frequency response of 4065/66/67

Solid line is with soft boost grid.  
Dotted line is with high boost grid.  
Green line is 4067 below 50 Hz.  
(4065 only utilizes the soft boost frequency response).

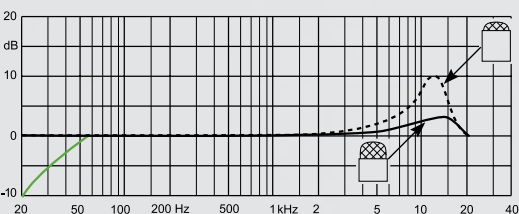

## Total harmonic distortion (THD)

<1 % THD up to 123 dB SPL peak;  
<1 % THD up to 120 dB SPL RMS sine

## Dynamic range

4065/66/88: Typ. 97 dB  
4067: Typ. 92 dB

## Max. SPL, peak before clipping

4065/66/88: 144 dB  
4067: 154 dB

## Output impedance

30 – 40 Ohm depending on current draw

## Cable drive capability

Up to 300 m (984 ft), with DAD6001: 100 m

## Power supply

4065/66/88: Min. 5 V, max. 50 V through DPA adapter  
4067: Min. 3 V, max. 50 V through DPA adapter

## Connector


MicroDot adapters are available for common connections

## Polarity


Positively increasing sound pressure produces positive-going voltage on MicroDot pin

## On-axis frequency response of 4088

Solid line is near field (2 – 3 cm/0.8 – 1.2 in).  
Green line is far field (more than 30 cm/12 in).  
Dotted line is typical low frequency in near field (estimated).

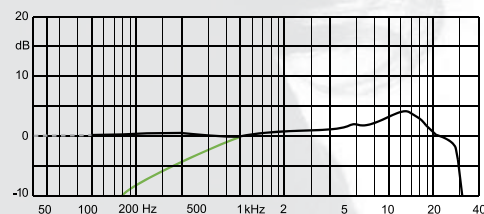


## Polar pattern of 4065/66/67



Directional characteristics (normalized)

## Polar pattern of 4088



Directional characteristics (normalized)

## SERVICE & REPAIR

Products from DPA Microphones are extremely stable and there should not be any significant change in the specifications with time and use. If, however, you are not totally satisfied with the characteristics exhibited by this product, please contact your nearest DPA Microphones representative for further details of service and the repair facilities that are available.

## CE MARKING

The CE mark guarantees that the product conforms with relevant directives approved by the European Commission.

EMC directive: 2004/108/EEC

Low voltage directive: 2006/95/EC



## WARRANTY

All products from DPA Microphones are covered by a two-year limited warranty on both mechanical functionality and documented specifications as long as the items are not mistreated, abused, or modified in any way. In case of a warranty claim your invoice is your warranty registration.

## ENVIRONMENTAL POLICY

This product is comprised by the WEEE Directive, and should not be thrown in the garbage bin when obsolete. Instead, return it to your local DPA representative (or DPA Microphones A/S directly) who will dispose of the product in accordance with the current environmental standards.

RoHS directive: 2002/95/EC  
WEEE directive: 2002/96/EC



## Headquarters:

DPA Microphones A/S  
Gydevang 42-44  
DK-3450 Allerød, Denmark

Tel: +45 4814 2828  
Fax: +45 4814 2700

info@dpamicrophones.com  
www.dpamicrophones.com

## United States:

DPA Microphones, Inc.  
2432 N. Main St., Suite 200  
Longmont, CO 80501, USA

Tel: +1 303-485-1025  
Fax: +1 303-485-6470

info-usa@dpamicrophones.com  
www.dpamicrophones.com

**DPA**  
MICROPHONES