

MIPRO®

User Guide

Condenser Vocal Microphone

MM-70/MM-80

MM-90



MIPRO®
MICROPHONE PROFESSIONALS

MIPRO Electronics Co., Ltd

Headquarters : 814 Pei-Kang Road, Chiayi, 60096, Taiwan
Tel : +886, 5, 238, 0809
www.mipro.com.tw
mipro@mipro.com.tw




2 CE544 A

All rights reserved. MN015/05


Do not copy or forward without prior approvals MIPRO.

Specifications and design subject to change without notice.

100% Made In Taiwan

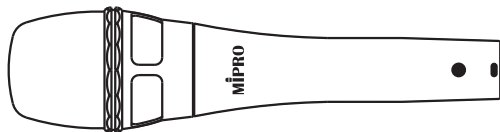MM-70/MM-80**Specifications**


Housing	Die-cast zinc alloy housing
Polar Pattern	Supercardioid
Sensitivity	-52dBV± 1dBV/Pa (0dB=1V Open-circuit voltage)
Frequency Response	50Hz ~ 20KHz @ 94dB SPL
S/N Ratio	>72dB @ 94dB SPL (1 Pa)
Max. Input SPL	147dB (Typical, 1% T.H.D.)
Dynamic Range	126dB
Power Supply	External phantom power 12~52V DC
Current Consumption	2.0mA
Output Impedance	200 Ω
Note	Refer to actual product in the event of product description discrepancy.

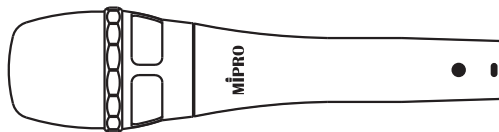MM-90**Specifications**


Housing	Die-cast zinc alloy housing
Polar Pattern	Supercardioid
Sensitivity	-52dBV± 1dBV/Pa (0dB=1V Open-circuit voltage)
Frequency Response	50Hz ~ 20KHz @ 94dB SPL
S/N Ratio	>72dB @ 94dB SPL (1 Pa)
Max. Input SPL	149dB (Typical, 1% T.H.D.)
Dynamic Range	126dB
Power Supply	External phantom power 12~52V DC
Current Consumption	2.0mA
Output Impedance	200 Ω
Note	Refer to actual product in the event of product description discrepancy.

Condenser Vocal Microphone



MM-70

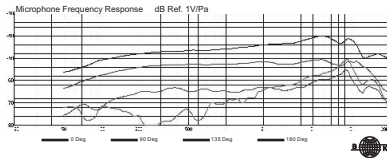

MM-80

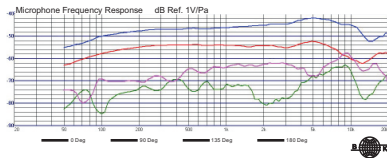


Frequency Response




MM-70 Polar Pattern MM-80

Condenser Vocal Microphone

MM-90

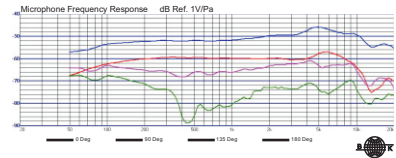

Frequency Response



Polar Pattern