


ControlSpace™ AMS-8 Local Input Module

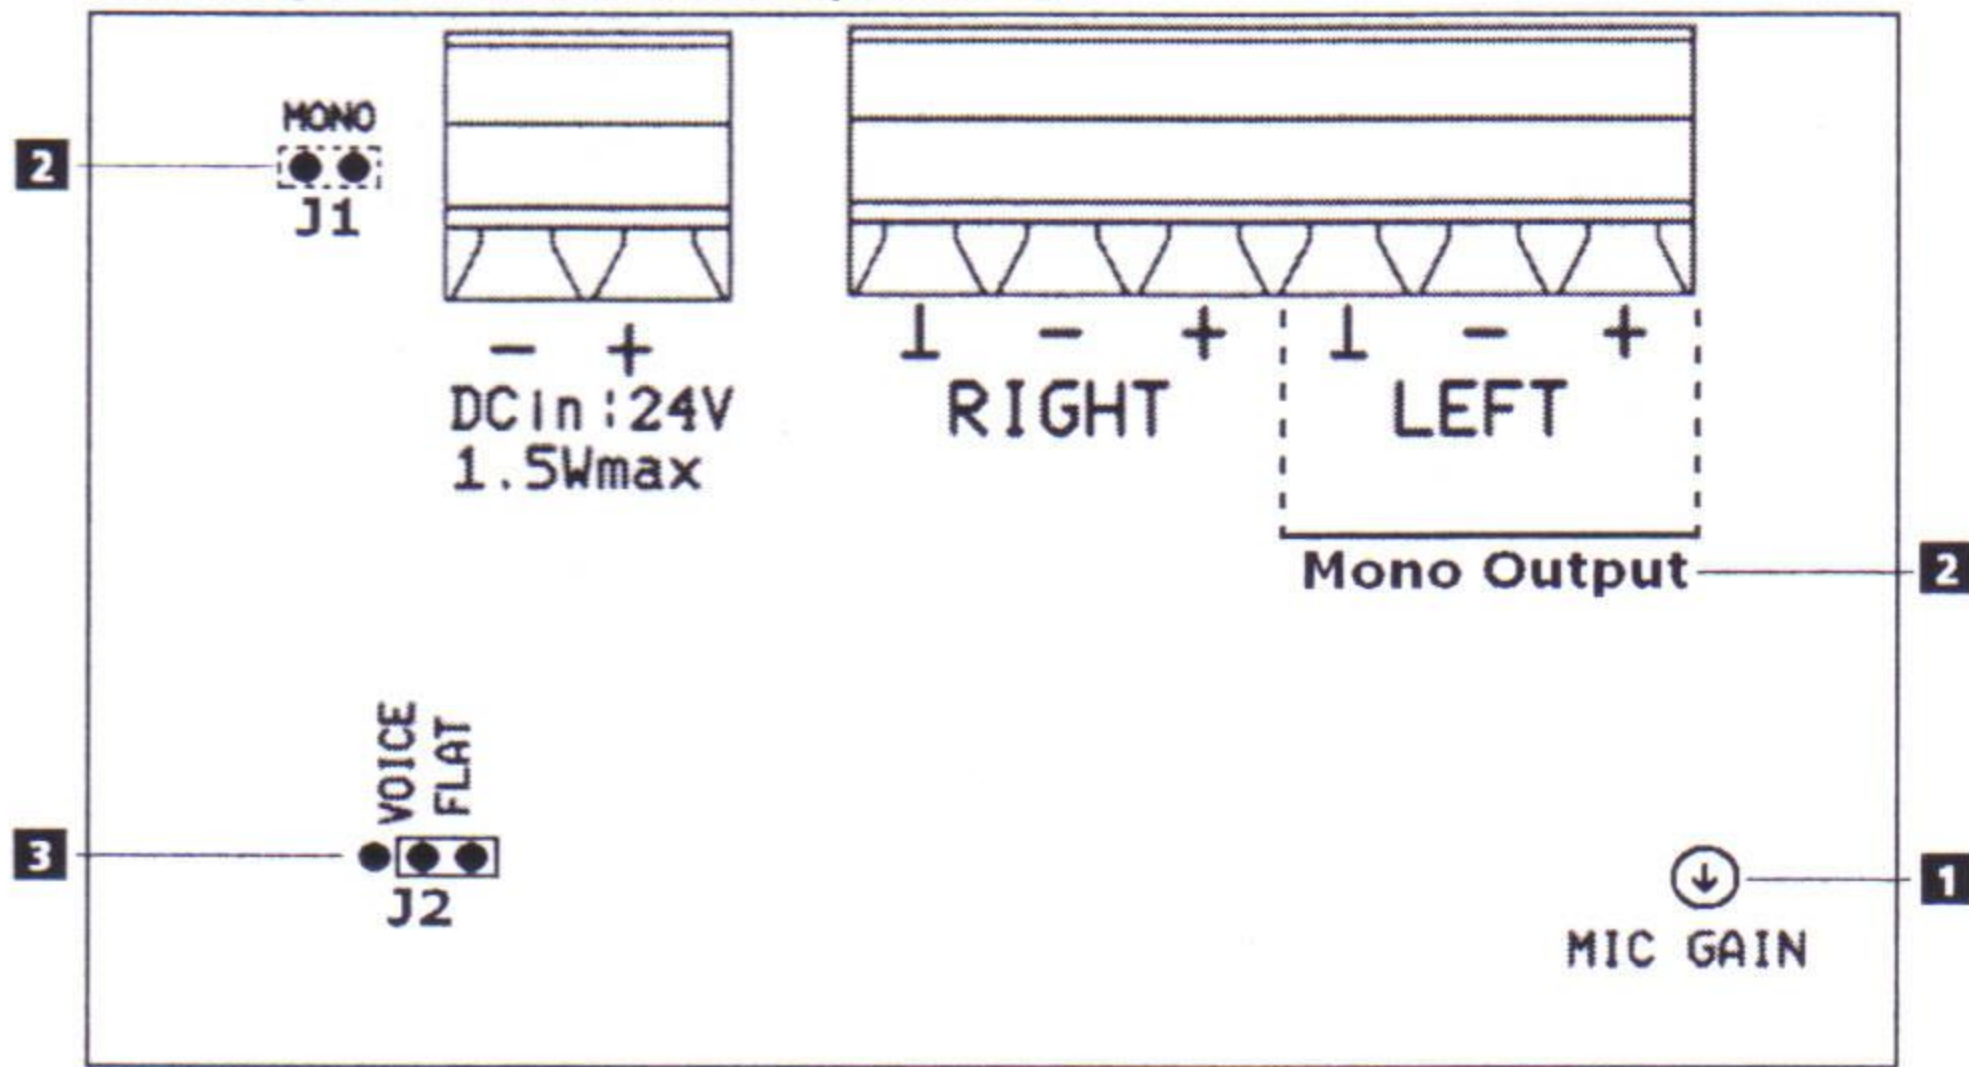

- 1** Mic Gain: 32 to 66dB (+38dB factory setting)
- 2** Mono configuration: Connect to Left output + Set Jumper J1
- 3** Voice EQ: Set Jumper J2 to select between a flat or voice EQ (optimized EQ for speech) for the microphone input only